


HINGE FOR FOLDING DOORS

Special single pivot hinge

- For free swinging and guided folding doors
- Both end positions stabilized through double acting spring of stainless steel
- Robust zinc die cast execution
- Solid barrel
- Flat folding and wing elements
- Adjustable offset of the turning point
- Height adjustment ± 1 mm
- Constant spring load, independent of the gap and turning point offset
- Pivot bearings of heavy duty plastic bushings
- Factory setting with 3 mm gap





Symmetrical and/or asymmetrical adjustment of the wing elements

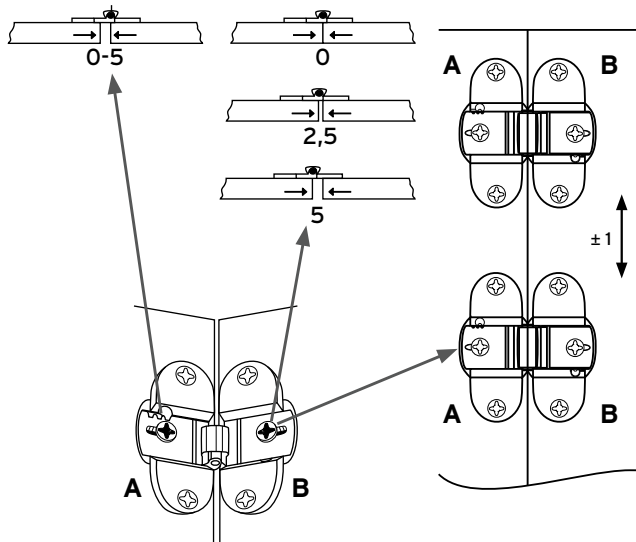

In case of free-swinging doors the total max. width of both panels is 600 mm
Application tips see page 6

To hold the wing elements flat install a support

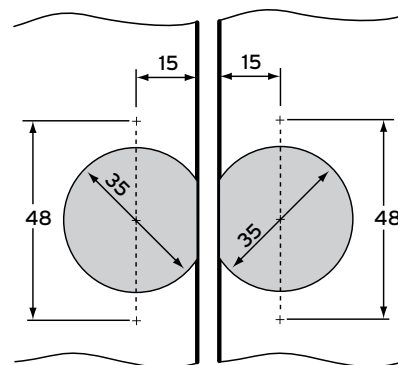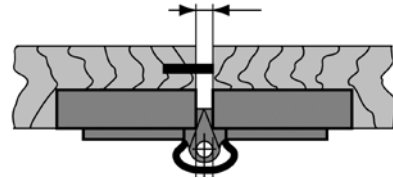

Drilling pattern
Drilling depth 9 mm
Cup fastening with chip wood board screws $\varnothing 4$ mm

					NORM
2002 N	50	180°	0 - 10	ab 13	DIN
Nickel plated		Black finish on request			